

PROTEMP™

PARAFFIN/DIESEL FORCED AIR HEATERS



PT-125T-KFAEU




PT-45-KFAEU

- *Powerful Instant Heat - High performance fan*
- *Safe & Efficient - Auto shut off if power is interrupted or flame is extinguished*
- *Quality Construction - Rugged steel body, heavy-duty motor & operating components*
- *Easy To Use - Fill with fuel, plug into approved power source and enjoy*
- *Value-Added Features - Unmatched quality & performance design*





PARAFFIN/DIESEL FORCED AIR HEATING

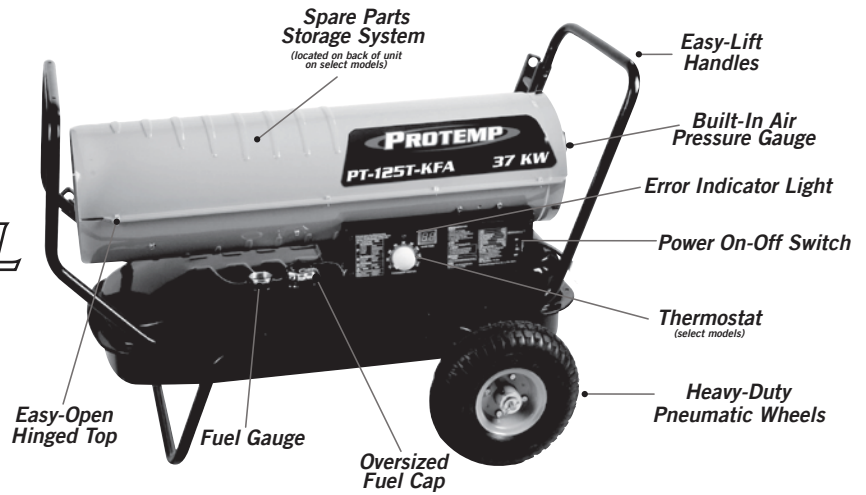

Portable Paraffin/Diesel-Fired Forced Air Heaters • Product Specifications/Features

Model	PT-45-KFAEU	PT-70T-KFAEU	PT-125T-KFAEU	PT-175T-KFAEU	PT-215T-KFAEU
Heat Output (kw)	13.0	20.5	36.6	51.2	63.0
Heat Output (BTU)	45,000	70,000	125,000	175,000	215,000
EAN# 0657888...	05045-2	05070-4	05125-1	05175-6	05215-9
Hot-Air Flow (CMH)	289	408	914	1,070	1,138
Fuel Tank Capacity (Litres)	19	19	38	49	49
Fuel Consumption (Ltr/Hr)	1.32	2.00	3.60	5.07	6.17
Max Operating Hours	14	9	10	9.5	8
Heating Area (cu. m)	249	385	702	974	1200
Motor Size (HP)	1/8	1/8	1/5	1/3	1/3
Multi-Fuel Capable	Yes	Yes	Yes	Yes	Yes
Air Pump Pressure (PSI)	3.0	3.7	4.5	6.5	8.0
Power (Volt / Hz / Amp), AC	To Customer Specification				
Weight (gross kgs / net kgs)	14.5 / 12.7	14.5 / 12.7	26.3 / 23	29.9 / 26.3	31.3 / 27.7
Box Size (L x W x H) (cm)	81 x 34 x 41	81 x 34 x 41	94 x 43 x 50	108 x 46 x 50	108 x 46 x 50
Unit Size (L x W x H) (cm)	76 x 34 x 39	76 x 34 x 39	94 x 55 x 64	106 x 60 x 65	106 x 60 x 65
Container Qty (40'N / 40'HQ)	480 / 575	480 / 575	272 / 330	220 / 275	220 / 275
Motor Approval	UL	UL	UL	UL	UL
Unit Approval	CE / GOST				
Added Value Features					
Power Switch	X	X	X	X	X
Error Indicator Light	X	X	X	X	X
Fuel Gauge	X	X	X	X	X
Contractor-Grade Fuel Cap	X	X	X	X	X
Integral Overheat & Flame-Out Safety	X	X	X	X	X
Extension Cord Wrap	X	X	X	X	X
Built-In Calibrated Air Pressure Gauge	X	X	X	X	X
Quick-Fix Service Access	X	X	X	X	X
Built-In Thermostat		X	X	X	X
Fuel Drain Plug			X	X	X
"Easy-Lift" Lift Handles			X	X	X
Spare Parts Storage System			X	X	X
Digital Operation System			X	X	X
Wheel Kit			X	X	X
Pneumatic Wheel Size (mm)			254	254	254
Quick Connect Assembly			X	X	X

*Specifications subject to change without notice. Use in accordance with any and all state or local codes, regulations, and/or ordinances. Please see heater "User's Operations and Installation Manual" included with each heater for a complete list of important safety information.

SUGGESTED USES

Workshops
Construction Sites
Farms
Garages
Any Outdoor Heating Need

IMPORTANT NOTES

Not for use in residential living areas or inadequately ventilated areas
Proper ventilation required during operation
Must be plugged into an approved standard electrical outlet for operation

©2011/2012
PINNACLE PRODUCTS INTERNATIONAL, INC.
668 STONY HILL ROAD, #302
YARDLEY, PA 19067
www.pinnacleint.com
Phone: 1-800-641-6996



PROPANE FORCED AIR HEATERS



PT-150V-GFA-EU




PT-40-GFA-EU

- *Powerful Instant Heat - High performance fan*
- *Safe & Economical - Auto shut off if power is interrupted or flame is extinguished*
- *Durable - Enclosed gas controls, heavy-duty steel construction*
- *Ready To Use - Connect to propane cylinder & plug in*
- *Value-Added Features - Unmatched quality & performance design*





PROPANE FORCED AIR HEATING

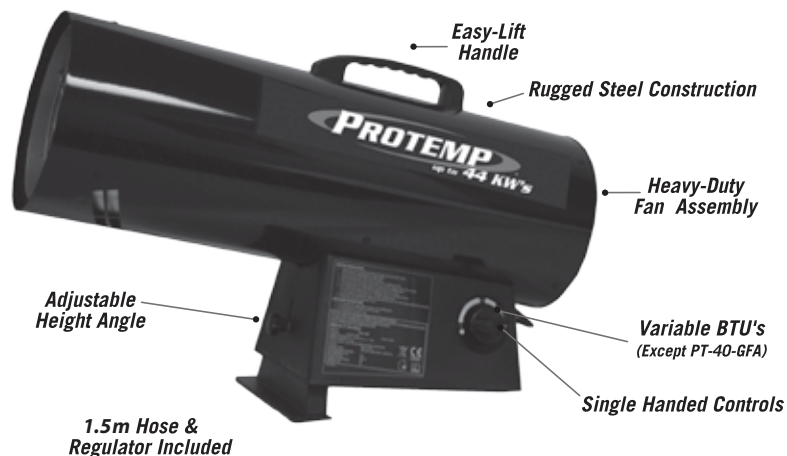

Portable Propane-Fired Forced Air Heaters • Product Specifications/Features

Model	PT-40-GFAEU	PT-50V-GFAEU	PT-100V-GFAEU	PT-150V-GFAEU
Heat Output (kw)	12	8.8-11.7-14.6	20.5-24.9-29.3	35.1-39.5-43.9
Heat Output (BTU)	40,000	30-40-50,00	70-85-100,000	120-135-150,000
EAN# 0657888...	05040-7	05050-6	05100-8	05150-3
Hot-Air Flow (CMH)	510	510	680	680
Required Cylinder Size (Kg)	13	13	47	47
Fuel Consumption (Kg. / Hr)	.86	.68 / .81 / 1.1	1.5 / 1.8 / 2.0	2.4 / 2.8 / 3.1
Max Operating Hours	15	19	31	19
Heating Area (cu. m)	227	283	566	860
Motor Size (HP)	1/10	1/10	1/9	1/9
Fuel Type	Propane	Propane	Propane	Propane
Weight (Gross kgs / net kgs)	6.4 / 5.1	6.4 / 5.1	10.9 / 8.0	10.9 / 8.0
Box Size (cm)	49 x 26 x 38	49 x 26 x 38	69 x 29 x 42	69 x 29 x 42
Unit Size (L x W x H) (cm)	46 x 18 x 33	46 x 18 x 33	64 x 22 x 39	64 x 22 x 39
Container Qty's (40'N / 40'HQ)	1294 / 1510	1294 / 1510	695 / 830	695 / 830
Unit Approval	CE / GOST	CE / GOST	CE / GOST	CE / GOST
Added Value Features				
Heat Settings	1	3	3	3
Adjustable Heat Angle	X	X	X	X
1.5 m Hose & Regulator	X	X	X	X
Over-Heat Shut-Off	X	X	X	X
Safe Extinguish if Power Interrupted	X	X	X	X
ABS Control Housing	X	X	X	X
Electronic Ignition		X	X	X
Variable BTU's		X	X	X

*Specifications subject to change without notice. Use in accordance with any and all state or local codes, regulations, and/or ordinances. Please see heater "User's Operations and Installation Manual" included with each heater for a complete list of important safety information.

SUGGESTED USES

Workshops
Construction Sites
Farms
Garages
Any Outdoor Heating Need

IMPORTANT NOTES

Not for use in residential living areas or inadequately ventilated areas
Proper ventilation required during operation
Must be plugged into an approved standard electrical outlet for operation

©2011/2012
PINNACLE PRODUCTS INTERNATIONAL, INC.
668 STONY HILL ROAD, #302
YARDLEY, PA 19067
www.pinnacleint.com
Phone: 1-800-641-6996

PROTEMPTM

PARAFFIN/DIESEL INFRARED HEATERS



PT-70-SS-EU



Ultra Portable



Low Noise



PT-125-OFR-EU

- **Powerful Heating - Instant Radiant Style Heat**
- **Safe & Economical - Auto shut off if power is interrupted or flame is extinguished**
- **Quality Construction - Rugged steel body, heavy-duty motor & operating components**
- **Portable - Easy lift hand & heavy-duty wheels (PT-125-OFR-EU only)**
- **Easy To Use - Fill with fuel, plug into approved power source & enjoy**
- **Value Added Features - Unmatched quality & performance design**






PARAFFIN/DIESEL INFRARED HEATING



Typical Forced Air Heater

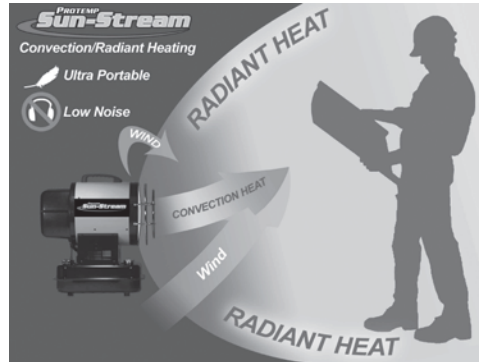

Convection / Radiant Heater

Portable Paraffin/Diesel Fired Infrared Heaters - Product Specifications / Features

Model	PT-70-SS-EU	PT-125-OFR-EU
Heat Output (kw)	20.5	27.8 / 36.6
Heat Output (BTU's)	70,000	95,000 / 125,000
EAN# 0657888...	09075-5	09126-4
Trade Brand	ProTemp Sun-Steam	ProTemp
Heat Type	Radiant + Fan Forced	Radiant + Fan Forced
Fuel Tank Capacity (Liters)	15	53
Fuel Tank Consumption (Ltr / Hr)	1.5	2.5 / 2.9
Max Operating Hours	7	20
Heating Area (cu. m)	396	780
Overheat Shut-Off System	Yes	Yes
Safety Shut-Off System	Yes	Yes
Weight (gross kg / net kg)	15.1 / 13.4	38.1 / 33.1
Box Size (L x W x H) (cm)	54.6 x 37 x 55.6	69.5 x 66.5 x 86.5
Unit Dimensions (L x W x H) (cm)	53 x 55 x 37	72.1 x 70.6 x 98
Container Quantity (40'N / 40'HQ)	496 / 580	106 / 106
Unit Approval	CE/GOST	CE/GOST
Added Value Features		
Quiet Operation Pump System	X	X
Power Switch	X	X
Electronic Controls	X	X
Error Indicator Light	X	X
Fuel Gauge	X	X
Contractor Gauge Fuel Cap	X	X
Easy-Lift Handle	X	X
Fan Forced Air Flow	X	X
Radiant Heating System	X	X
Heavy-Duty Wheels		X



*Specifications subject to change without notice. Use in accordance with any and all state or local codes, regulations, and/or ordinances. Please see "User's Operations and Installation Manual" included with each heater for a complete list of important safety information.

These specifications are estimates only.

SUGGESTED USES

Workshops
Garages
Farms
Construction Sites
Any Outdoor Heating Need

IMPORTANT NOTES

Not for use in residential living areas or inadequately ventilated areas
Proper ventilation required during operation

©2011/2012
PINNACLE PRODUCTS INTERNATIONAL, INC
668 STONY HILL ROAD, #302
YARDLEY, PA 19067
www.pinnacleint.com
Phone: 1-800-641-6996



ELECTRIC HEATERS



PT-09-400-EU



PT-02-230-EU

- *Dependable Powerful Heat Output*
- *Convenient Wall Mountable or Standing Options*
- *Strong Steel Construction & Durable Handles*
- *Safe Overheat Protection Features*





ELECTRIC HEATING



Portable Electric Heaters - Product Specifications / Features

Model	PT-02-230-EU	PT-033-230-EU	PT-05-400-EU	PT-09-400-EU
Heat Output (kw)	.65 / 1.3 / 2	.03 / 1.65 / 3.3	2.5 / 5.0	4.5 / 9.0
Heat Output (BTU)	2,218 / 4,436 / 6,824	102 / 5,630 / 11,260	8,530 / 17,060	15,354 / 30,708
EAN # 0657888...	TBD	TBD	TBD	TBD
Air Flow (CMH)	186	476	530	1,086
Heating Area (cu. m)	38.6	63.8	97	174
Power (Volt/Hz / Amp)	230 / 14.34	230 / 14.34	400 / 7.22	400 / 13
Phase	Single (1)	Single (1)	Three (3)	Three (3)
Weight (gross kg / net kg)	4.1 / 3.6	5.6 / 5.0	6.4 / 5.8	11.8 / 10.6
Box Size (L x W x H) (cm)	22.5 x 24.5 x 36	31 x 30.5 x 45	31 x 30.5 x 45	46.5 x 40.5 x 53
Unit Size (L x W x H) (cm)	20 x 22.5 x 31	25 x 26.5 x 40	25 x 26 x 40	35 x 47.5 x 49
Container Qty (40 ft. N / 40 ft. HQ)	971 / 1,139	1,530 / 1,760	1,530 / 1,760	1,000 / 1,170
Unit Approval	CE / ITS			
Added Value Features				
Heat Settings	3	3	4	4
Thermostat Control	X	X	X	X
IPX4 Protection Rating	X	X	X	X
Overheat Protection	X	X	X	X
Wall Mountable		X	X	X
Fan Only Option	X	X	X	X
Convenient Carry Handle	X	X	X	
1.5 m Cable & Plug Set	X	X	X	No Plug Supplied

*Specifications subject to change without notice. Use in accordance with any and all state or local codes, regulations, and/or ordinances. Please see heater "User's Operations and Installation Manual" included with each heater for a complete list of important safety information. *These specifications are estimates only.*

SUGGESTED USES

Offices
Workshops
Garages
Any Other Indoor Workplace

©2011/2012
PINNACLE PRODUCTS INTERNATIONAL, INC
668 STONY HILL ROAD, #302
YARDLEY, PA 19067
www.pinnacleint.com
Phone: 1-800-641-6996

PROTEMPTM

PORTABLE INFRARED GAS-FIRED HEATERS



PT-14A-CH-EU



*PT-14S-CH-EU
Ultra-Slim Cabinet Design*



PT-11P-CPH-EU



- *Safe and Easy Operation Features*
- *Rolling Casters Create Easy Portability (Cabinet Models)*
- *Efficient High Thermal Heat Output*
- *Operates On Standard 15KG Gas Cylinder*



PORTABLE INFRARED GAS-FIRED HEATING



Portable Infrared Gas-Fired Heaters - Product Specifications / Features

Model	PT-14A-CH-EU	PT-14S-CH-EU	PT-11-CPH-EU	PT-11P-CPH-EU
Heat Output (kw)	1.4 / 2.75 / 4.1	1.4 / 2.75 / 4.1	1.6 / 3.2	1.6 / 3.2
Heat Output (BTU)	4,776 / 9,383 / 14,000	4,776 / 9,383 / 14,000	5,500 / 11,000	5,500 / 11,000
EAN# 0657888...	11013-2	11010-1	11011-8	11008-0
Required Cylinder Size (kg)	13	13	13	13
Fuel Consumption (kg / h)	0.1 / 0.2 / 0.3	0.1 / 0.2 / 0.3	.12 / .23	.12 / .23
Max Operating Hours	130 / 65 / 43	130 / 65 / 43	129	129
Heating Area (cu. m)	79	79	62	62
Fuel Type	Propane	Propane	Propane	Propane
Weight (gross kg / net kg)	10.4 / 8.7	10.4 / 9.3	2.0 / 1.7	2.54 / 2.24
Box Size (L x W x H) (cm)	75.5 x 45.5 x 40.5	75.5 x 45.5 x 31.5	25.5 x 12 x 43.5	25.5 x 20 x 43.5
Unit Size (L x W x H) (cm)	72.5 x 42 x 34	73 x 42 x 22	40.6 x 29.2 x 33	45.7 x 29.2 x 38
Container Qty (40 ft. N / 40 ft. HQ)	537 / 638	537 / 638	4,200 / 4,950	2,420 / 3,000
Unit Approval	CE	CE	GOST	GOST
Added Value Features				
Heat Settings	3	3	2	2
Infrared Burner	X	X	X	X
Hose & Regulator Included	X	X	X	X
Over-Heat Limit Switch	X	X		
Built-In Oxygen Depletion Sensor	X	X		X
Anti-Tilt Safety Device	X	X		
Ignition Type	Piezo	Piezo	Match	Piezo
Rear Locking Castors	X	X	NA	NA
Ultra-Slim Cabinet Design		X	NA	NA
Adjustable Stand	NA	NA	X	X

*Specifications subject to change without notice. Use in accordance with any and all state or local codes, regulations, and/or ordinances. Please see heater "User's Operations and Installation Manual" included with each heater for a complete list of important safety information. *These specifications are estimates only.*

SUGGESTED USES

Workshops
Tailgating
Farms
Any Outdoor Heating Need

IMPORTANT NOTES

Not for use in residential living areas or inadequately ventilated areas
Proper ventilation required during operation

©2011/2012
PINNACLE PRODUCTS INTERNATIONAL, INC
668 STONY HILL ROAD, #302
YARDLEY, PA 19067
www.pinnacleint.com
Phone: 1-800-641-6996